



## Foot switch for ophthalmology MFS PHACO-MED

### Features/Options:



- Pedal with proportional output signal (both vertical and horizontal)
- 4 rocker switches with 2 switching functions each
- Programmable braking points for tactile feedback

### Notes

- Photo shows optional accessories

- Intuitive and highly precise operability
- Wireless signal transmission via steute wireless SW2.4LE-MED (optional)

### Dimensions

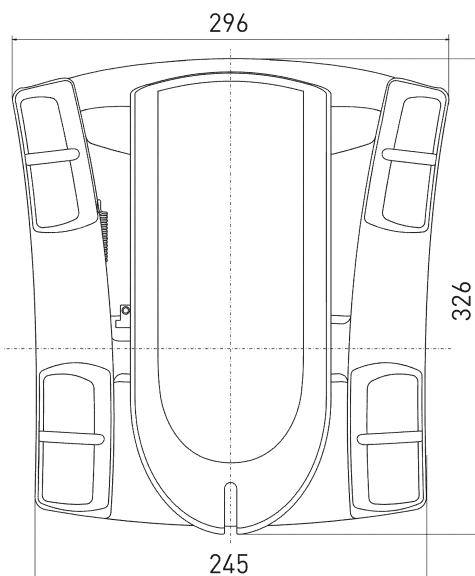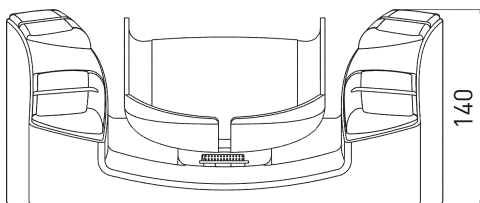

### Technical data

Applied standards	IEC 60601-1, ANSI/AAMI ES60601-1, IEC 60529
Enclosure	thermoplastic, impact resistant
Rocker switch	robust, operating theatre approved silicon
Degree of protection	IP X8 to IEC/EN 60529
Switching system	rocker switch: 8 switching functions pedal: with proportional output signal, horizontal: -10°... 0 ... 10° +/- 2°, vertical: 0 ... 15° +/- 1°
Mechanical life	Rocker switch: > 250 000 operations Pedal: > 1 million operations
Connection	2 m cable, other lengths optionally available
Switching voltage	max. 25 VAC / 60 VDC
Switch-on current	max. 1 A
Switching capacity	max. 20 VA

Errors and omissions excepted.