



Wireless tilting sensor sWave.NET® RF RW SW915-NET Material number: on request


Features/Options:

- Sensor with sWave.NET® wireless technology for the detection of small parts containers
- Simple assembly in commercially available standard shelves

Notes

- The wireless tilting sensor and the assembling kit must be ordered individually. The assembling kit is not included with the wireless tilting sensor.

Dimensions

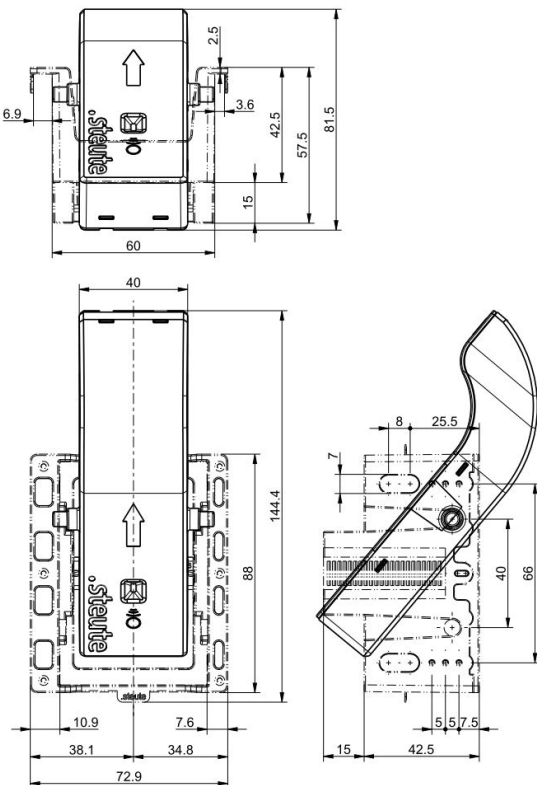

Technical data

Applied standards	EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 61000-4-2, EN 301 489-1, EN 301 489-3, EN 300 220-1, EN 300 220-2
Enclosure	PC-ABS, UL 94 HB, red, similar to RAL 3003
Cover	PC-ABS, UL 94 HB, grey, similar to RAL 7015
Bracket	PC-ABS, grey, similar to RAL 7015
Tensioning clips	POM, black
Degree of protection	in installation position: IP 54 to IEC/EN 60529
Protocol	sWave.NET®
Frequency	915 MHz (USA, Canada and Mexico)
Transmission power	< 25 mW
Data rate	66 kbps
Channel bandwidth	550 kHz
Voltage supply	integrated batteries
Battery life	approx. 10 years (depending on actuation frequency)
B _{10d} (10 % load)	2 million
T _M	max. 10 years, depending on existing actuation frequency
Degree of pollution	2
LED display	lights up red on actuation
Actuating force	0.3 N ... 0.5 N (with vertical actuation; box weight min. 500 g)
Roller conveyor incline	-27° ... +90°

Errors and omissions excepted.



Wireless tilting sensor sWave.NET®
RF RW SW915-NET
Material number: on request

Technical data

Mechanical life	> 1 million operations
Ambient temperature	-10 °C ... +50 °C
Storage and shipping temperature	-10 °C ... +50 °C
Shock resistance	16 g
Vibration resistance	5 g (10-150 Hz)
Wireless approvals	USA: FCC Part 15.247: XK5-RF Rx SW915 Canada: IC RSS-210: 5158A-RF Rx SW 915 Mexico: IFT - RCPSTRF17-1886
Wireless range	SW868/915/917: max. 450 m outside, max. 40 m inside SW922: max. 150 m outside, max. 20 m inside